


Orchid Electronics Switching DI

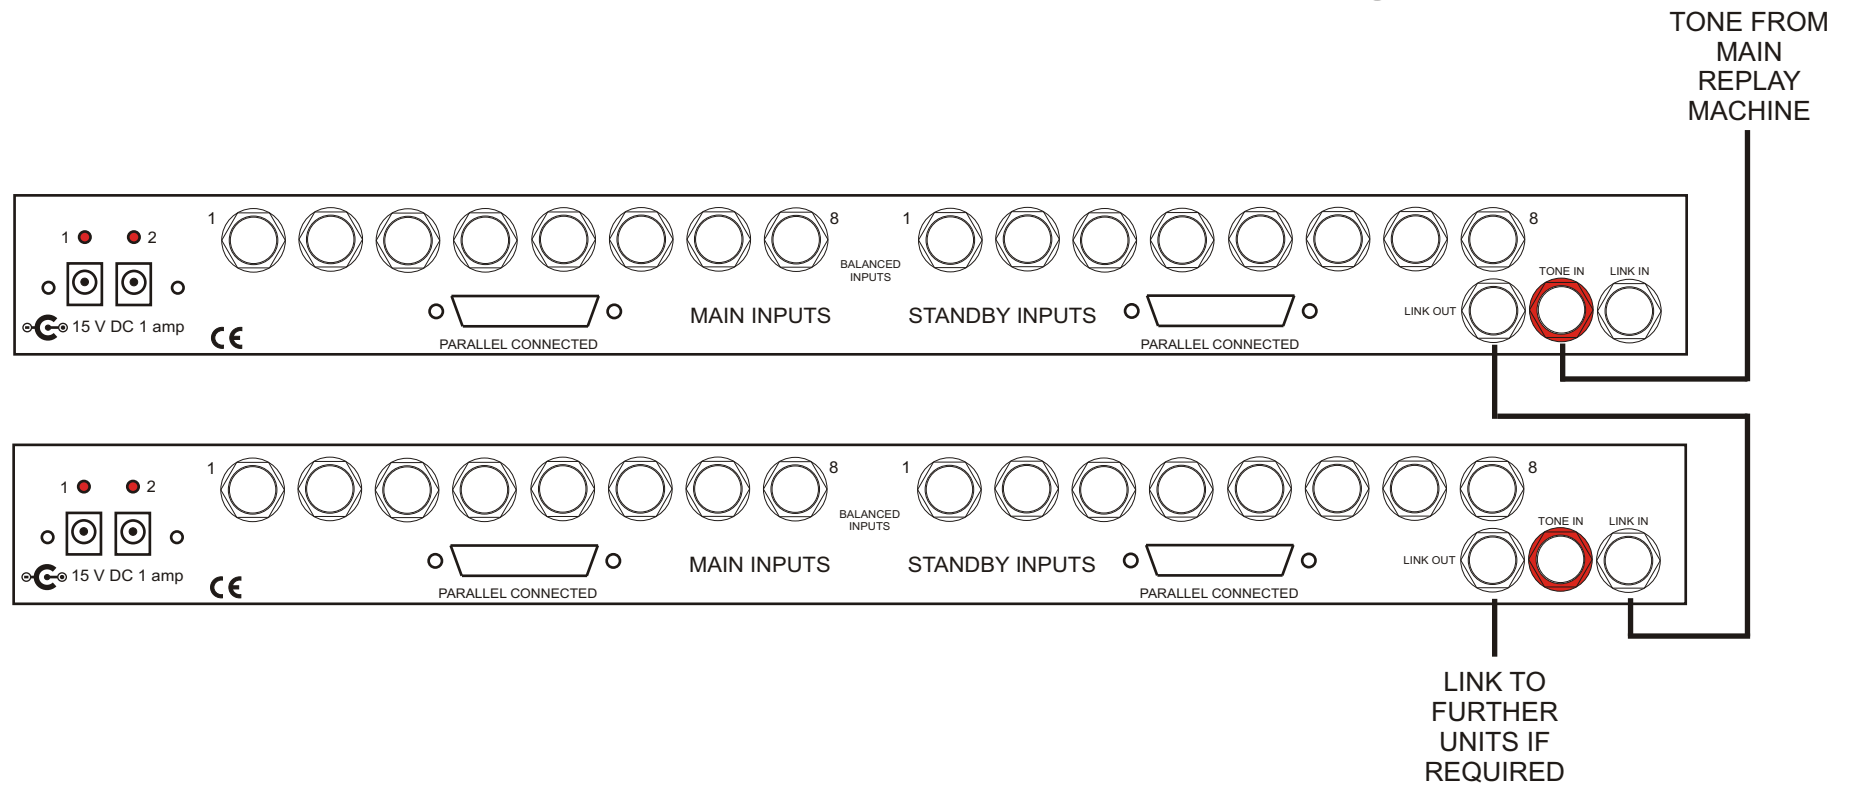

POWER SUPPLY CAN BE USED ANYWHERE IN THE WORLD WITHOUT ADJUSTMENT

15 VOLT OUTPUT ON STANDARD 2.1mm CENTRE POSITIVE CONNECTOR - TWO PSU'S CAN BE CONNECTED IF REQUIRED.

INPUTS FROM THE REPLAY MACHINES CAN BE CONNECTED TO THE TRS JACK SOCKET INPUTS, OR VIA THE 25 WAY 'D' CONNECTOR - WHICH IS WIRED IN PARALLEL.

FURTHER CHANNELS CAN BE ADDED - WITH NO LIMIT - ALL CONTROLLED FROM THE FIRST UNIT.